
product line **BASIC**

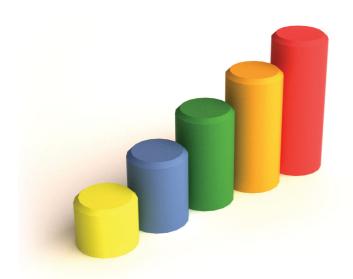

PALISADE

PRODUCT COMPOSITION

rubber granules, PUR binder, lightweight concrete

COLOR COMBINATION

All color range available on request

COLOR STABILITY

color may fade due to UV (up to level 3 on gray scale)

SAFETY SURFACE

no safety area required according to EN1177

PRODUCT SAFETY

certified according to EN1176

INSTALLATION

the product is installed onto a concrete foundation


PACKAGING

wrapped in plastic and delivered on a pallet of a size according to number of pieces.


STORAGE

in original packaging on a pallet in temperatures between - 40° C and 50° C



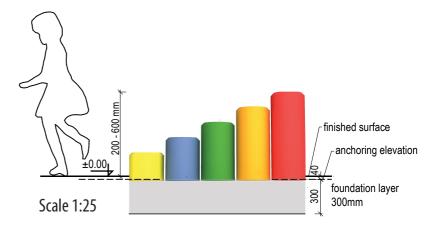













Ø 230mm h = 200 - 600 mm



Nová 1073 763 02 Zlín - Malenovice Czech Republic







